



LIVEN LVL Series

AGM (Absorbent Glass Material) technology with gas recombination. VRLA (Valve Regulated Lead Acid Battery). Maintenance-Free Sealed Lead Acid Battery. Battery with 12 years design life in float service.

Cycle use 1: Up to 260 cycles at 100% DOD.

Cycle use 2: Up to 500 cycles at 50% DOD.


Applications:

- Telecommunications
- Uninterrupted Power Supplies
- Medical equipments
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply

Dimensions:

Length	229±1.5mm (9.02in)
Width	138±1.5mm (5.43in)
Height	211±1.5mm (8.31in)
Total Height	216±1.5mm (8.50in)

Technical Drawings:

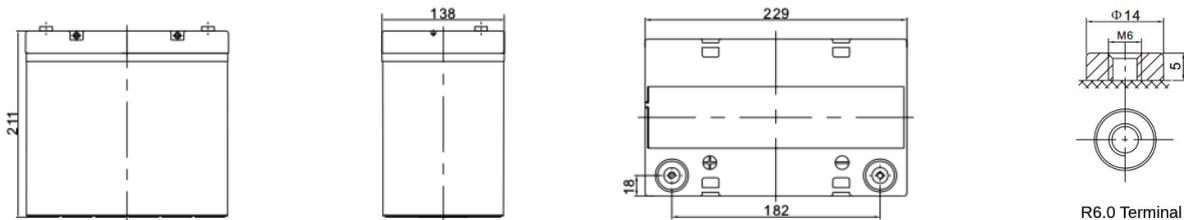

Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V./ Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	193.00	135.10	100.70	58.29	34.21	20.49	15.05	12.22	10.32	6.89	5.86	3.01
1.65V	186.00	131.10	98.08	57.01	33.57	20.19	14.85	12.07	10.20	6.82	5.81	2.98
1.70V	176.90	125.80	94.61	55.32	32.73	19.79	14.58	11.87	10.04	6.73	5.73	2.95
1.75V	165.30	119.00	90.09	53.10	31.63	19.27	14.23	11.60	9.83	6.61	5.63	2.91
1.80V	150.60	110.20	84.28	50.23	30.19	18.57	13.76	11.25	9.55	6.44	5.50	2.85
1.85V	132.50	99.31	76.95	46.56	28.33	17.67	13.15	10.78	9.18	6.23	5.33	2.78

Constant Power Discharge (CP, Unit: W/Battery) at 25°C (77°F)

F.V./ Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	1993.20	1398.60	1072.20	645.00	389.52	236.52	175.02	142.92	121.14	82.02	70.20	36.06
1.65V	1972.20	1392.60	1066.20	640.20	386.34	234.78	173.76	141.84	120.36	81.42	69.66	35.82
1.70V	1896.60	1351.80	1037.40	624.60	378.00	230.82	171.06	139.80	118.68	80.40	68.82	35.46
1.75V	1803.60	1301.40	1002.00	605.40	367.08	225.72	167.64	137.16	116.64	79.08	67.74	34.98
1.80V	1672.20	1227.00	951.00	578.70	352.02	218.70	162.78	133.44	113.70	77.34	66.24	34.38
1.85V	1497.60	1125.00	880.20	541.80	332.76	209.22	156.30	128.46	109.74	74.88	64.26	33.48


Specifications:

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	55.0Ah @10hour-rate to 1.80V per cell @25°C
Weight	Approx. 17.20Kg ±2% (37.92lbs)
Internal Resistance	Approx. 6.0mΩ
Terminal	R6.0
Max. Discharge Current	550A (5sec)
Design Life	12 years (Float charging) Eurobat (20°C): 10-12 years Long Life
Recommended Maximum Charging Current	16.5A
Standby Use Voltage	13.5V~13.8V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.4V~15.0V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: -10°C~45°C Storage: -15°C~50°C
Normal Operating Temperature Range	25°C±5°C


Self Discharge
LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.

Container Material A.B.S. UL94-HB, UL94-V0 Optional.


Discharge Characteristics Curve

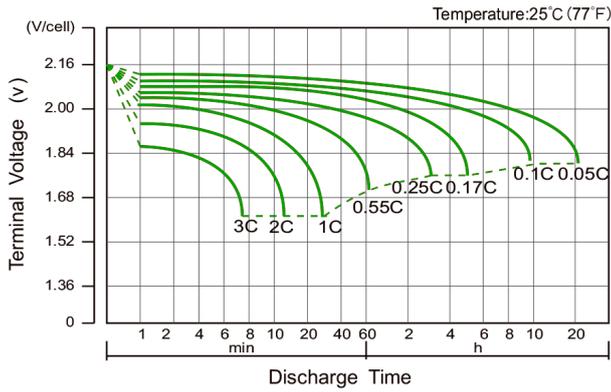


Charge Characteristic Curve For Standby Use

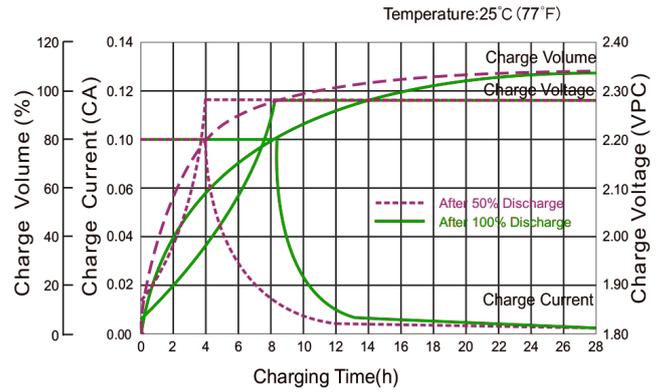


Cycle Life In Relation To Depth Of Discharge

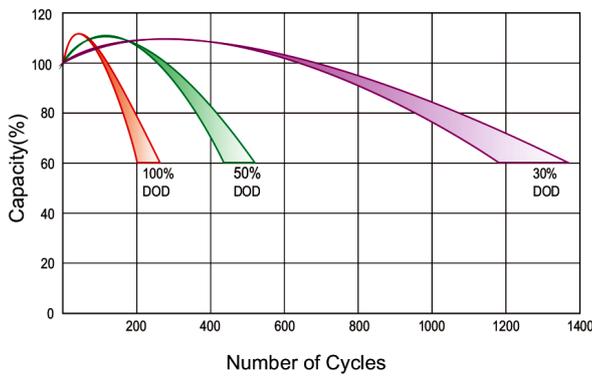


Relationship Between Charging Voltage And Temperature

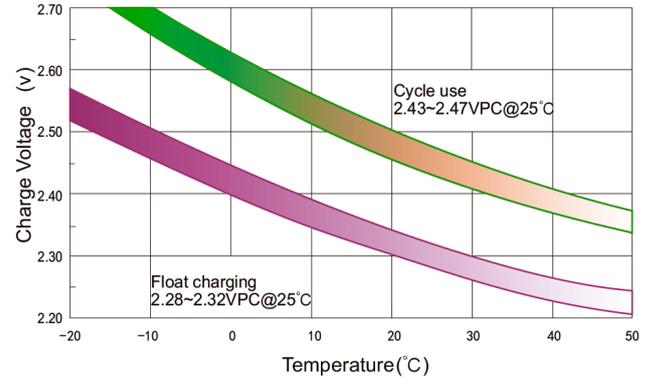


Temperature Effects On Capacity

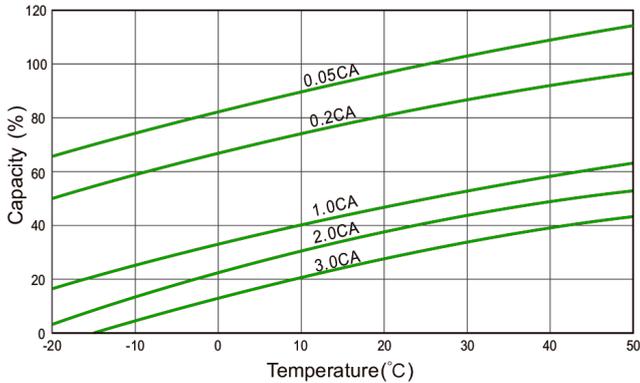


Storage Characteristics

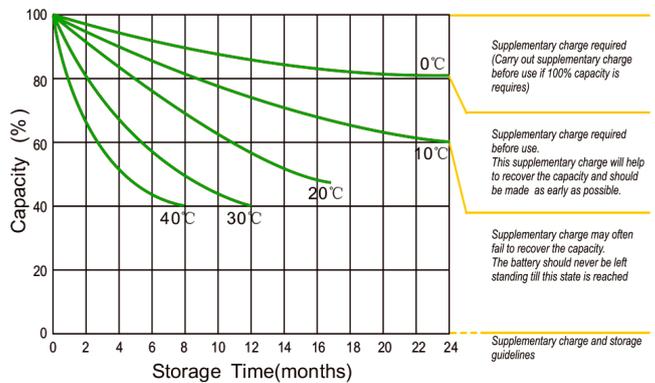

Effect Of Temperature On Long Term Life

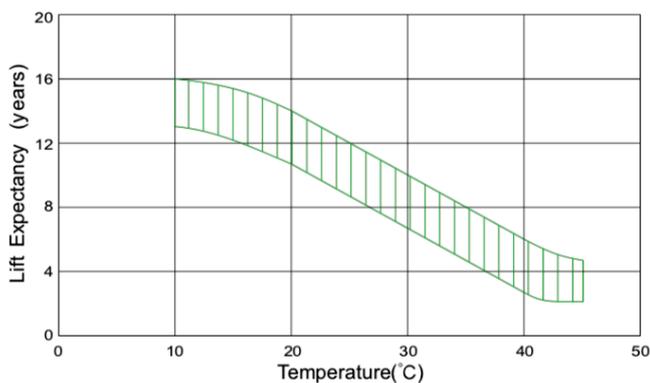

Life Characteristics Of Standby Use

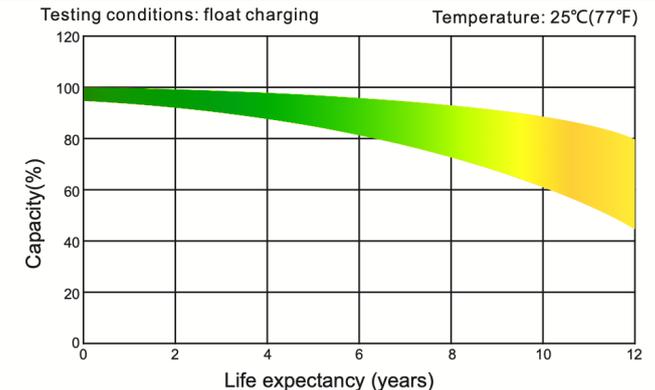

(Note) All above information shall be changed without prior notice. LIVEN Battery reserves the right to explain and update the latest information.